



washroom

Geltronic

- 1/ Mains operated for the larger area.
- 2/ Either 24 hour running or on / off adjustable timer settings.
- 3/ Easily replaced solid gel
- 4/ Available in Grained stainless steel, polished stainless steel or powder coated white.
- 5/ Gel life 4 - 6 weeks approx (if totally exposed to the air)

Order Codes


CAIR4W	Continuous running with a white front cover
CAIR4S	Continuous running with a brushed stainless steel front cover
CAIR4P	Continuous running with a polished stainless steel front cover
CAIR6W	Timed running with a white front cover
CAIR6S	Timed running with a brushed stainless steel front cover
CAIR6P	Timed running with a polished stainless steel front cover

Specification

	Continuous Running Geltronics	Timed Running Geltronics
Approx. Coverage	60 sq metres	
Power	230v ac 50Hz	
Width	250mm	
Height	222mm	
Depth	120mm	
Outer Case	Epoxy powder coated white, brushed 304 stainless or polished 304 stainless	
Timings	n/a	Adjustable switches 1,2 or 5 mins on and 5 minutes off 1, 2, 5 minutes on and 10 minutes off

Packing Details

Width	26cm
Height	23cm
Depth	13cm
Weight	3Kg

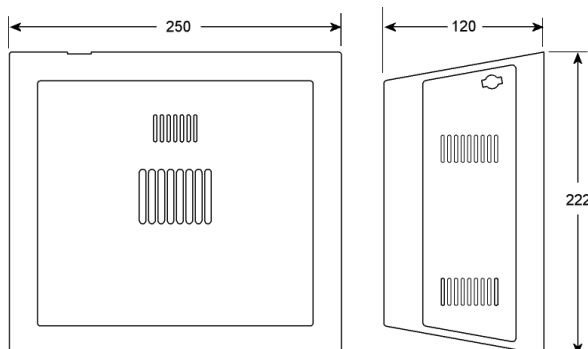

**BUILT IN
BRITAIN**

The manufacturer reserve the right to change specifications without prior notice