



Water heating



Powerstream Ascari

Central heating and hot water flow boilers

- Direct replacement for gas, oil, propane, solid fuel or electric storage heating*
- Suitable for sealed and open vented systems
- Suitable for unvented wet central heating and domestic hot water systems
- Compact design fits in most spaces




Key Features

- Integral circulation pump and expansion vessel
- Choice of 4, 6, 8, 10 or 12kW on installation
- Ideal for well insulated properties of up to 80m²
- 5 litre water storage for rapid response
- Stainless steel elements
- 3 year UK guarantee on tank and 2 year on components

Technical Specification

- Maximum power 4-12kW
- Includes 8 litre expansion vessel, 3 bar pressure relief valve and 3 speed pump for quick and easy install
- 7 segment digital displays of temperature and pressure
- Frost protection 5°C minimum temp
- Operating pressure 0.5 bar - 3 bar
- Top or bottom cable entry

Dimensions

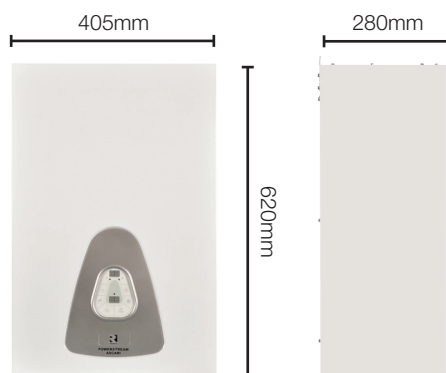

Product Range

Product Ref.	Finish	Model	Cat No.
Powerstream Ascari	White	PSA12	45551860

* Building Regulations apply

The Powerstream Ascari should be permanently connected to the electrical supply through a double linked switch with minimum breaking capacity for the loading. All wiring should conform to the current edition of the IEE wiring regulations.