




## AC3N, AC3RN, AC45N, AC6N

- Designed for localised heating around open doors
- Can be used as a high level fan heater
- Adjustable airflow direction
- Full heat, Half heat & Fan only settings
- Choice of 3kW, 3kW remote, 4.5kW & 6kW
- All 3kW & 4.5kW models designed for single doors
- 6kW model designed for double doorways

## Technical Details

<b>Element:</b>	Wire stitched element
<b>Blower Units:</b>	Tangential blowers
<b>Control Type:</b>	On-board controls (AC3N, AC45N & AC6N) Additional wireless control for model AC3RN
<b>Control functions:</b>	On/off, Two heat settings (Half heat & Full Heat) Remote control over On/Off on model AC3RN
<b>Installation:</b>	Included wall bracket
<b>Construction / Finish:</b>	Pressed steel case with powder coat finish
<b>Cable:</b>	None supplied
<b>Approvals:</b>	CE , BEAB
<b>IP Rating:</b>	IP21
<b>Safety:</b>	2 x electrical hold reset cut-outs
<b>Warranty:</b>	12 months

## Range Details

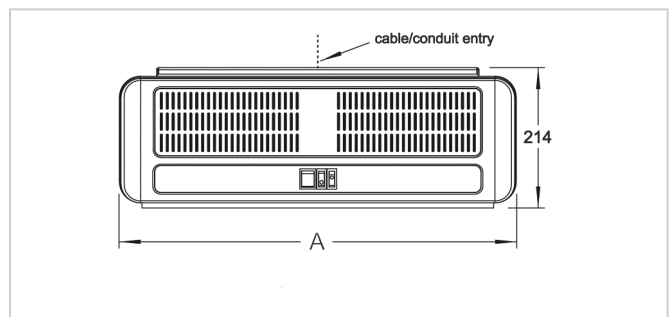

Model	AC3N	AC3RN	AC45N	AC6N
Heat output (kW)	1.5/3.0	1.5/3.0	2.25/4.5	3.0/6.0
Voltage	230V 1PN	230V 1PN	230V 1PN	230V 1PN
Length A (mm)	605	605	605	905
Height (mm)	200	200	200	200
Depth (mm)	135	135	135	135
Air velocity	6.2m/s	6.2m/s	5.5m/s	8.3m/s
Noise dB(A)	50.5	50.5	52.0	57.0
Weight (kg)	5.1	5.3	5.2	7.2

## Accessories



Model AC3RN supplied as standard with wireless controller over On/Off Function.

## Additional Information

Optimum mounting height 1.8m—2.3m